


Royde & Tucker H300 rising butt hinge

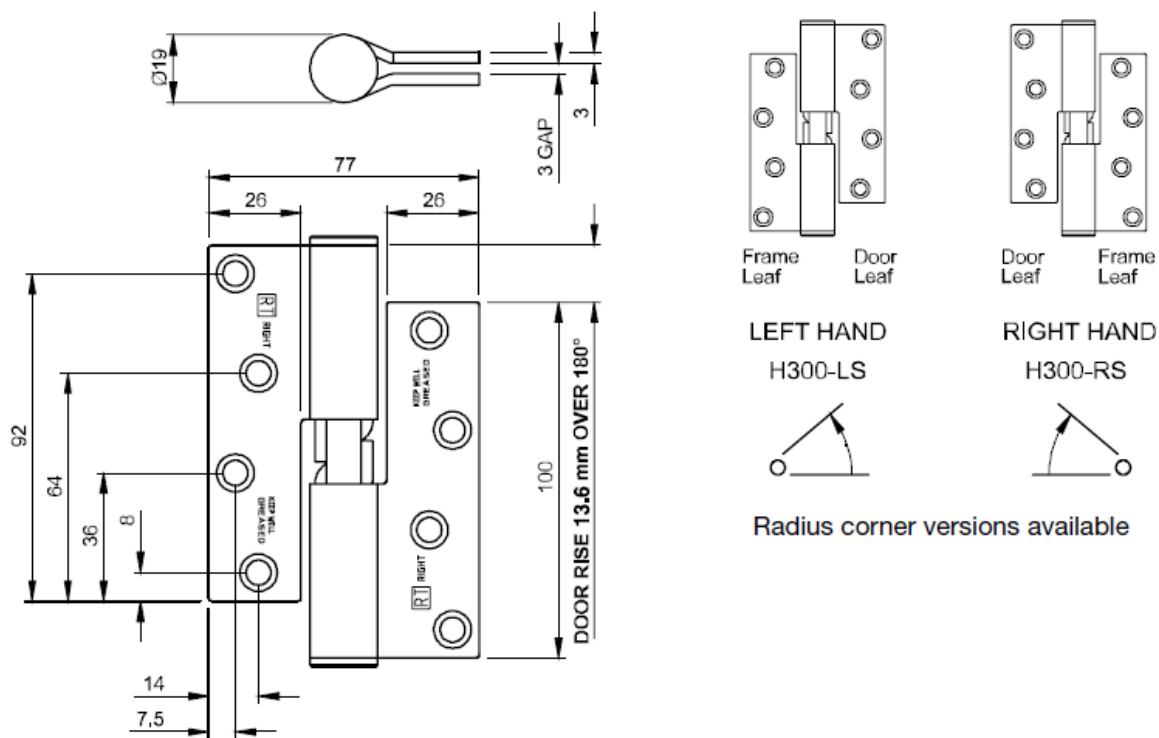

These hinges cause the door to SHUT

Rising butt hinge

- 100x77x3mm rising butt hinge
- These hinges cause the door to SHUT
- Maximum adjusted door weight 50kg as standard or up to 80kg (please contact the sales office for advise).
- Minimum door thickness 29mm
- c/w metric 5 x 32mm wood screws
- Radius R5 on LR/RR versions
- To ensure correct working, pairs of rising butts must be fitted co-axially with screws supplied.
- Special door head/frame details may be required to allow the door to rise
- Due to the precision engineering of our rising butt hinges, 3 or even 4 can be used per door leaf, if required
- Unless otherwise stated stainless steel substrate, Grade 316 stainless steel available

Notes:

- These butt hinges are not to be confused with the HI-LOAD range, in that they require regular maintenance. After fitting, the cam faces and pin must be lubricated with grease supplied, following the manufacturer's instructions.

Royde & Tucker Ltd
Bilton Road
Cadwell lane
Hitchin
SG4 0SB

Tel: 01462 444444

Fax: 01462 444433



www.ratman.co.uk

e-mail: sales@ratman.co.uk

REQUIRED CHAMFER CUT ON TOP CORNER OF DOOR

Door width 44mm - flush with front of frame

3mm door/overpanel gap

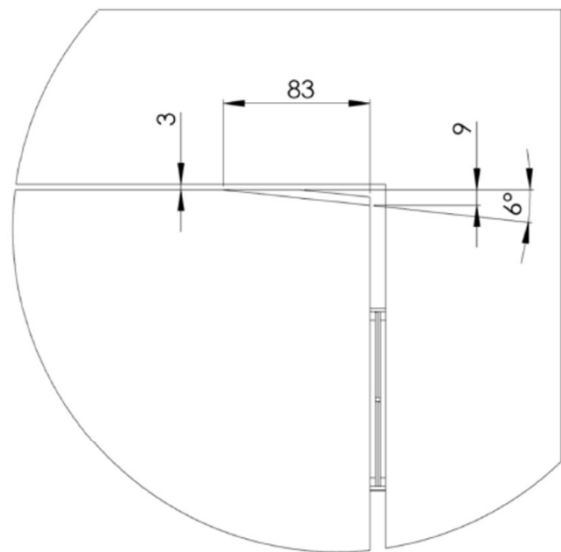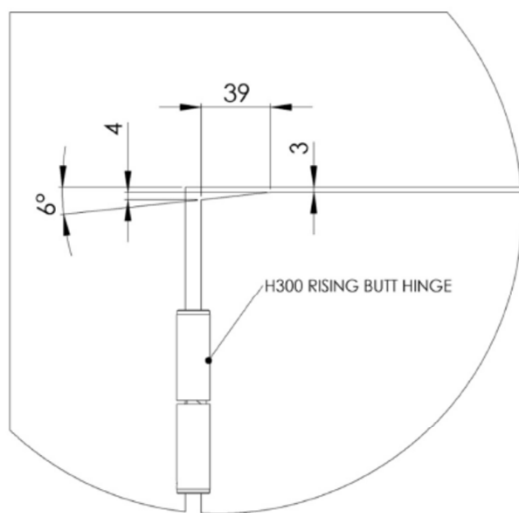

These hinges cause the door to SHUT